

## FDP SERIES LENSES For OSRAM GOLDEN DRAGON LEDs

- High efficiency
- Available in 2 different beams
- Patent pending

The FDG Series offer low-profile lenses especially designed for the Golden Dragon <sup>(1)</sup> LEDs from Osram Optosemiconductor.


A software-optimized aspheric profile combined with front shaped micro-lens arrays enables the generation narrow beam and medium beam output patterns (2).

The high collection efficiency reaches 85% of the total flux emitted by the LEDs. Lens holders are available either in white PC/ABS or transparent PC, and provide the proper alignment between the LEDs and the lenses.

Heat staking the four legs of the holder to the customer's PCB or heat sink provides excellent optical and mechanical assembly (see Fraen Application Note FAN01-EN (at [www.fraen.com](http://www.fraen.com))).

Typical applications are:

- Reading lamps
- Signs
- Architectural Lighting
- Street Lights

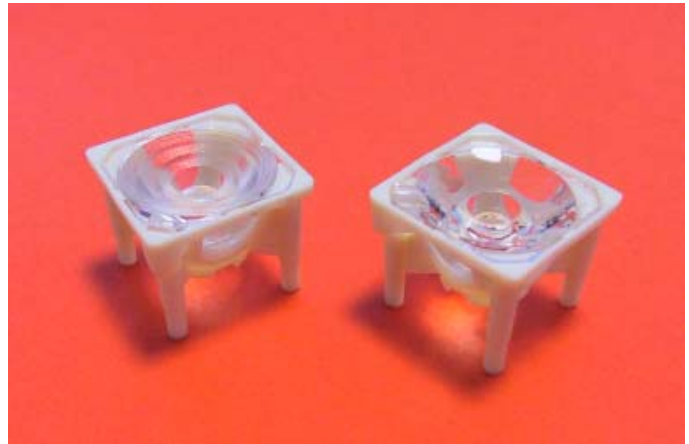

- (1) Golden Dragon is a trademark of Osram OptoSemiconductor. For technical specification on LEDs please refer to the Golden dragon datasheet or visit [www.osram-os.com](http://www.osram-os.com)
- (2) Typical beam divergence may change with different color LEDs.

*For ordering instructions, please contact*

### FRAEN CORPORATION


Scott M. Grzenda  
80 Newcrossing Road  
Reading MA 01867  
Phone: 781.205.5300  
Fax: 781.942.2426

### FRAEN Srl

Maryline Thorailer  
Via E.Fermi, 7  
20090 Cusago (MI) – Italy  
Phone: +39 02.90.39.40.49  
Fax: +39 02.90.39.37.36

Email: [optics@fraen.com](mailto:optics@fraen.com)

Website: [www.fraensrl.com](http://www.fraensrl.com)

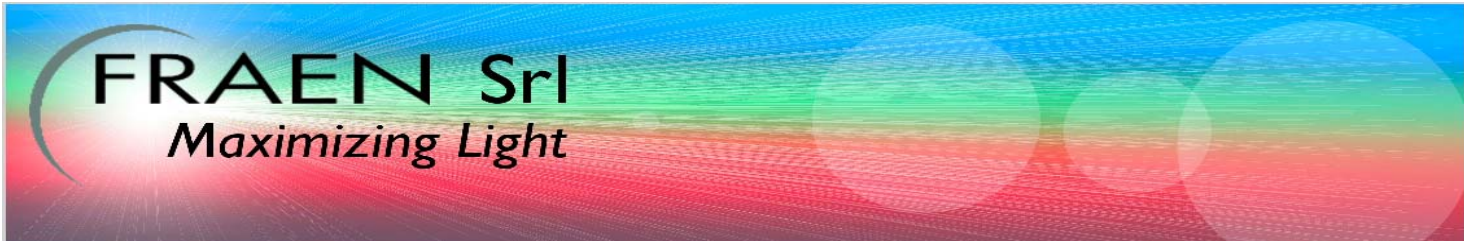

## General Characteristics

---

Lens Material	Optical Grade PMMA
Holder Material	PC ABS or Transparent PC
Operating Temperature range	-40deg C / + 80 deg C
Storage Temperature range	-40deg C / + 80 deg C

Average transmittance in visible spectrum (400 – 700nm) >90%, as measured using 3mm thick Optical Grade PMMA.

## Optical Characteristics

Typical beam total divergence (deg)		Blue / Green Dragon	Yellow / Red Dragon	White Dragon		
		ThinGaN	ThinFilm	NOTA	Volume casting	Chip coating
Lens Part Number	Type of lens	LxW5SG	LxW5SF	LWW5SG	ZWW5SG	LWW5SG
FDP-N1-D01-xx	Narrow beam	9	9	13	11	9,5
FDP-M1-D01-xx	Medium beam	14,5	15	18	16	13,5

The typical total divergence is the full angle measured where the luminous intensity is half of the peak value. The typical divergence may change with different color LEDs due to different chip size and chip position tolerance.

Typical on axis efficiency (cd/lm)		Blue Dragon	Green Dragon	Yellow Dragon	Red Dragon	White Dragon		
		ThinGaN	ThinGaN	ThinFilm	ThinFilm	NOTA	Volume casting	Chip coating
Lens Part Number	Type of lens	LBW5SG	LGW5SG	LxW5SF	LxW5SF	LWW5SG	ZWW5SG	<b>LWW5SG</b>
FDP-N1-D01-xx	Narrow beam	13,1	18,4	12,8	14,9	9,6	12,4	17,1
FDP-M1-D01-xx	Medium beam	5,8	8,4	6	6,5	5,2	6,5	9

To calculate the on axis intensity, multiply the on axis efficiency of the lens (cd/lm) by the total flux of the Dragon LEDs you use. For more detail on flux binning please check the datasheet of the Golden Dragon LEDs by Osram OS.


## Mechanical Characteristics

---


In order to get the best optical performances showed above, you need to have the exact mechanical position of the lens on the Dragon LED.

In order to do so, you need to use the lens you need (Narrow, Medium) with its holder.

### Lens + holder assembly view:

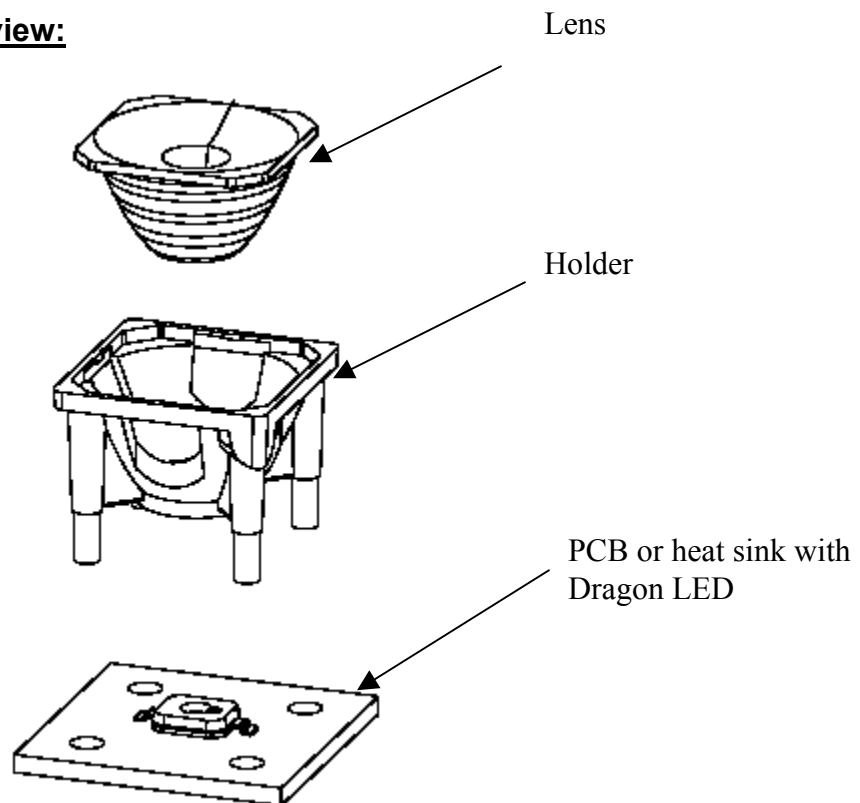


## Lens + Holder assembly dimensions on PCB board:

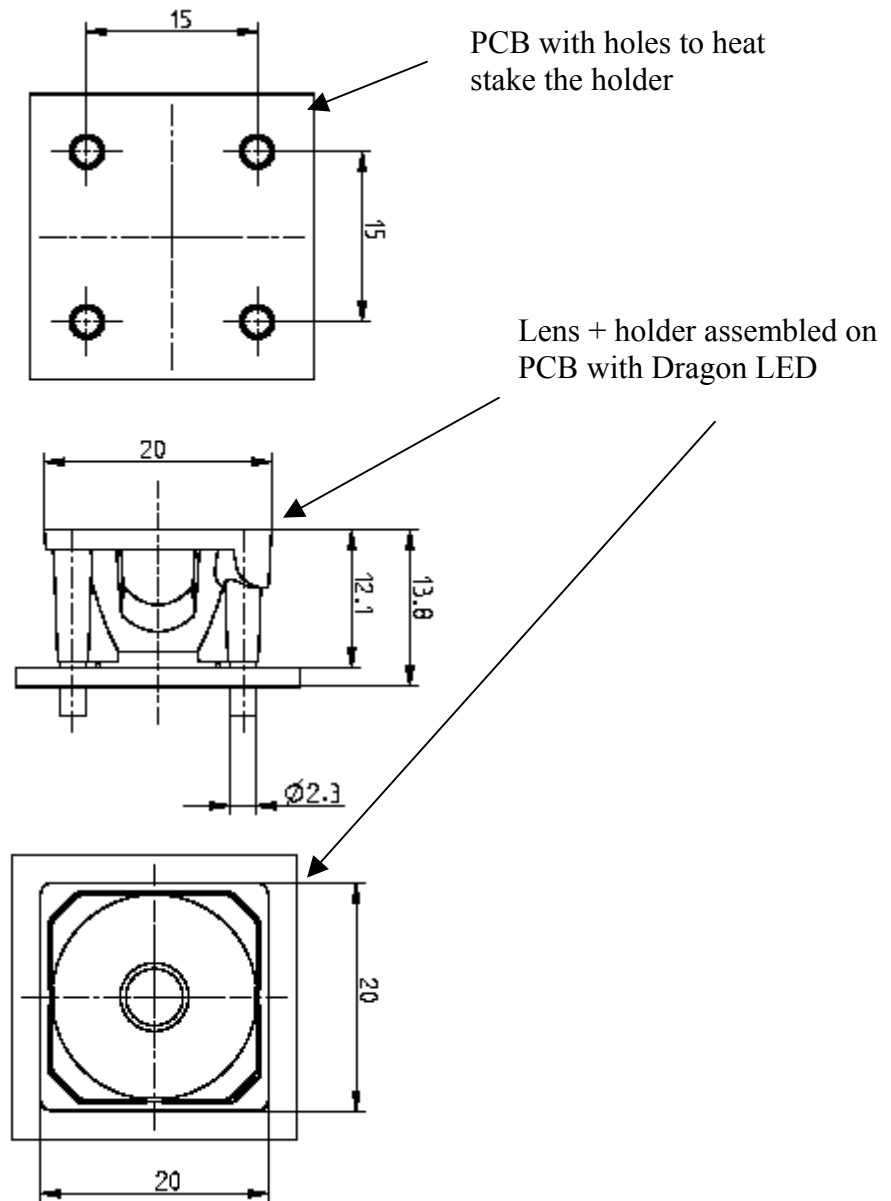


tolerances : +\_0.2mm

The lens can be identified by the top view:

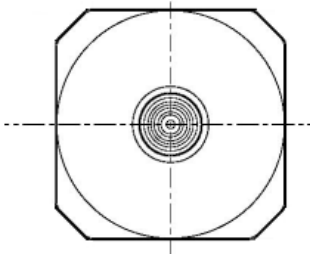


**Narrow beam lens:**

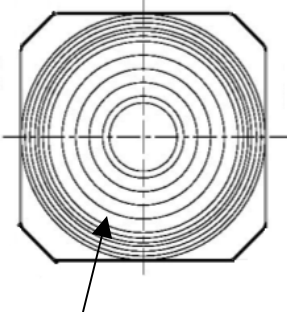

**Medium beam lens:**

Light texture on the top lens


Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specification described in the section "OPTICAL CHARACTERISTS".

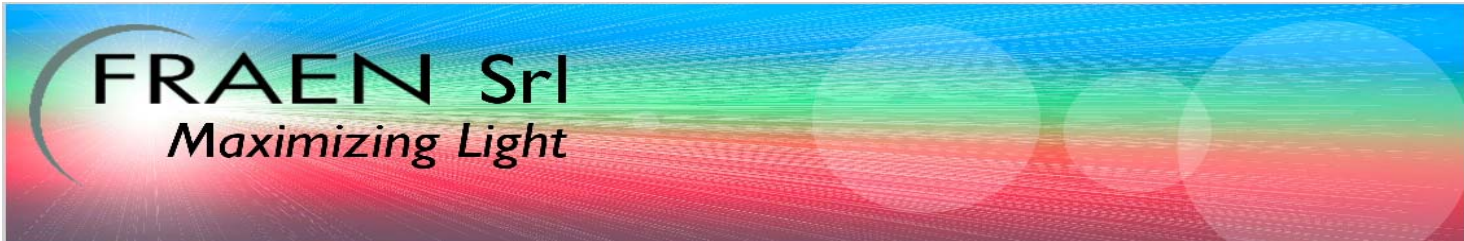

**Ordering part numbers**

---

FDP-xx-D01-zz

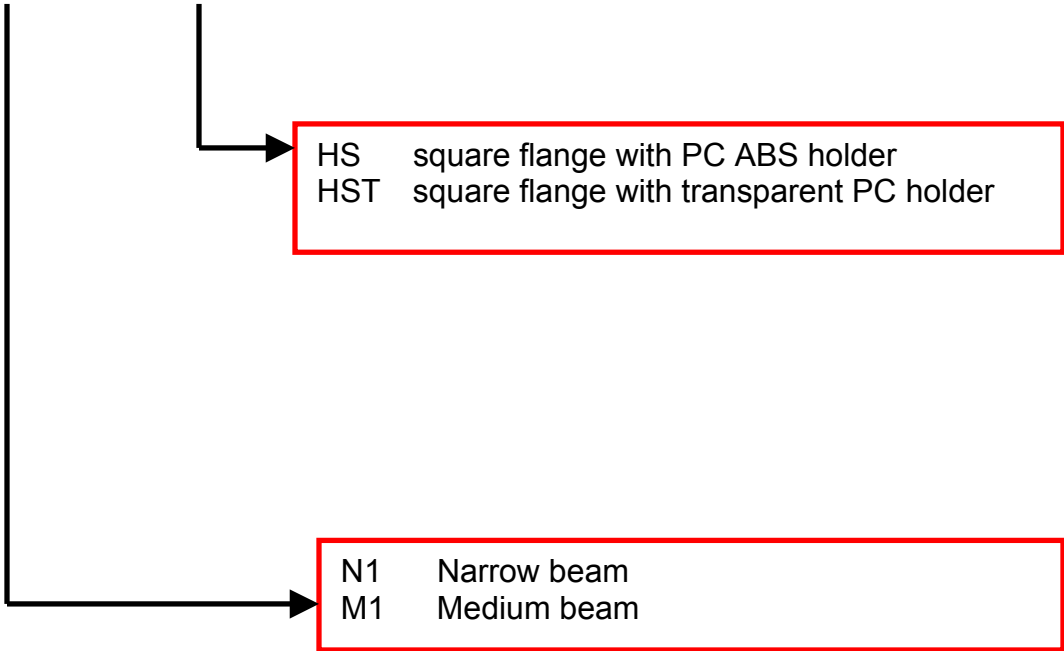

Published by Fraen Corporation.  
All technical data contained in this document are properties of Fraen Corporation and may change without notice.